Seven-conductor multi-gauge trailer cable from Remington Industries is a great fit for many trailer wiring projects. The GPT automotive-grade wires are insulated with color-coded PVC to better resist oils, fuels, solvents, and outdoor conditions. Additionally, the seven wires come wrapped in a black PVC jacket for a cable solution that is organized and easy to work with.

This trailer cable is ideal for routing power to lights, brakes, and other systems between cars, trucks, trailers, RVs, and more. Remington Industries offers trailer wire in several configurations to best meet your specifications, and in multiple lengths for your convenience.

- Number of Conductors: Seven, Individually Insulated
 - Wire Type: SAE J1128 Type GPT Automotive Primary Wire
 - Conductor Material: Bare Copper
 - Wire Sizes / Stranding:
 - -- (x2) 10 AWG, 19 strands of 23 AWG wire (19/23)
 - -- (x1) 12 AWG, 19 strands of 25 AWG wire (19/25)
 - -- (x4) 14 AWG, 19 strands of 27 AWG wire (19/27)
 - Color-Coded PVC Insulation:
 - -- 10 AWG: Black, White
 - -- 12 AWG: Blue

TRAILER CABLE (7 CONDUCTOR, MULTI GAUGE, JACKETED) DATA SHEET - REMINGTON INDUSTRIES

-- 14 AWG: Brown, Green, Red, Yellow

- Cable Outer Jacket: Black PVC, 0.055" Thick
- Cable Overall Diameter: 0.550"
- Voltage Rating: 60 V
- Temperature Rating: -30 to +80°C (-22 to +176°F)

14 AWG

BLAC

BLU

WHITE


10 AWG


10 AWG

14 AWG

12 AWG

• 16 Spool Sizes Available (See Below)

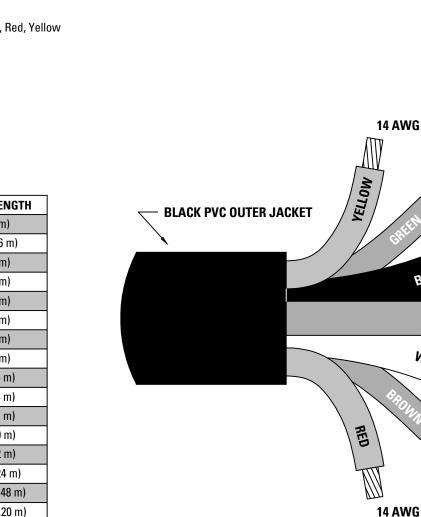

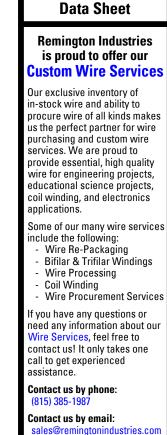

7-Conductor 10-12-14 AWG

Jacketed Trailer Cable

DATE | ISS. | REVISION | BY Drawn by: Drawing rev.: --Remington 3521 N. Chapel Hill Rd

x7 STRANDED COPPER WIRES

Johnsburg, IL 60051 USA remingtonindustries.com

AG 5/21/21

PART NUMBER	CABLE LENGTH
TRC0007CBP-0-1	1 ft (0.30 m)
TRC0007CBP-0-1.5	1.5 ft (0.46 m)
TRC0007CBP-0-2	2 ft (0.61 m)
TRC0007CBP-0-3	3 ft (0.91 m)
TRC0007CBP-0-4	4 ft (1.22 m)
TRC0007CBP-0-5	5 ft (1.52 m)
TRC0007CBP-0-6	6 ft (1.83 m)
TRC0007CBP-0-8	8 ft (2.44 m)
TRC0007CBP-0-10	10 ft (3.05 m)
TRC0007CBP-0-12	12 ft (3.66 m)
TRC0007CBP-0-15	15 ft (4.57 m)
TRC0007CBP-0-20	20 ft (6.10 m)
TRC0007CBP-0-25	25 ft (7.62 m)
TRC0007CBP-0-50	50 ft (15.24 m)
TRC0007CBP-0-100	100 ft (30.48 m)
TRC0007CBP-0-250	250 ft (76.20 m)